

DNP

DNP RE-TRANSFER CARD PRINTER

CX210

The Best Printing

Solution for
Contact & Contactless
Smart Cards

NEW



CX210

Unique Features


- Excellent printing quality on rough-surface card
- Enables you to expand the selection for card materials (PET, ABS, PC etc.)
- Perfect choice for heavy duty job and user-friendly operation
- Real edge-to-edge printing with the highest yield ever achieved-125 cards/h
- The most reliable & best quality printer developed by the well-known ink ribbon manufacturer, DNP.

► Specification

Printing Method	Dye Sublimation Re-transfer Printing
Resolution	300 dpi
Printable Area	Full-Bleed
Ink Ribbon	YMCKBk/Intermediate Transfer Film 1,000 sides per set (Products of DNP)
Interface	SCSI II Interface
Print Speed	29 seconds/card
Operating Environment	15-30C, 35-70%RH
Hopper Capacity	300 cards (0.76mm thickness)
Stocker Capacity	100 cards (0.76mm thickness)
Signal Level	256 levels per color (YMC) 2 levels (Bk)
Dimension	343mm(W) × 339mm(D) × 381mm(H)
Weight	22kg
Options	Magnetic Stripe Encoding / IC Encoding / Contactless IC Encoding
Applicable card	(Material) PVC and other plastic materials (need to be evaluated) / (Size) 54mm × 85.6mm

*Due to policy of continuous development, we reserve the right to alter details of specification and equipment without notice.

► Dimensions

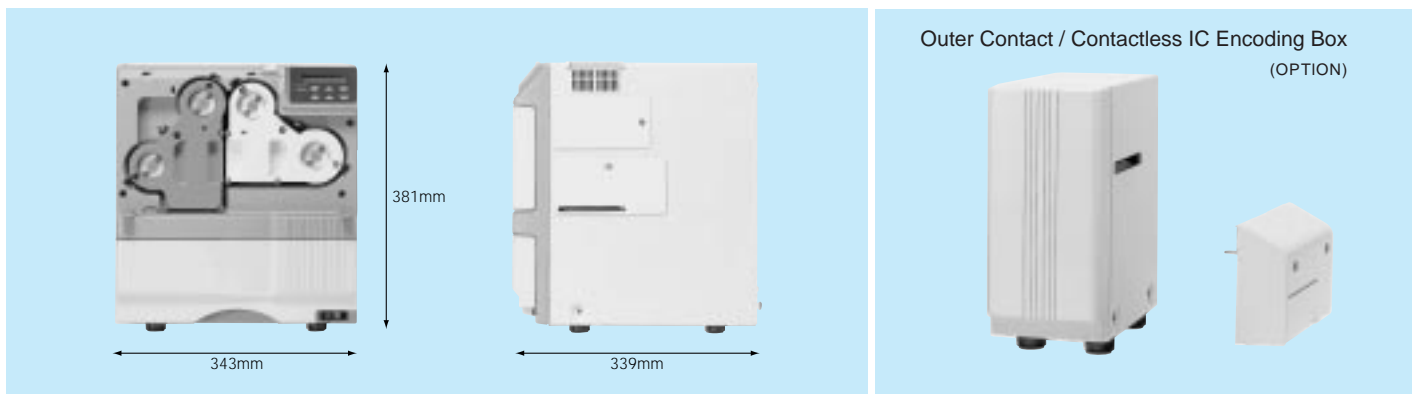

交流科技股份有限公司

East Wind Technologies, Inc.

台北市大安區復興南路一段 390 號 7 樓之 3

Tel: +886-2-7712-8686 Fax: +886-2-7712-8688

Email: info@ewt.com.tw [Http://www.ewt.com.tw](http://www.ewt.com.tw)